



Twin Bridge AXLE SCALE

60,000 lb Capacity Vehicle Scale
For Vehicle and Container Weighing Applications

THE ECONOMICAL SOLUTION FOR TRUCK AND VEHICLE WEIGHING

Weighs and totals vehicle's front & rear axle weight

Built to withstand harsh environments

NEMA 4X/IP66
Stainless Steel
Indicator Enclosure

NEMA 4X Stainless Steel
Junction Box Enclosures

Heavy Duty I-Beam Construction

Easy Set Up



MODEL TS60-730AW
Twin Bridge Axle Scale



Includes Ohaus T71XW NEMA 4X/IP66 rated
digital indicator with dual readout feature

Key Features And Specifications

- Capacity: 60,000 lb x 20 lb (total)
- Dimensions:
Weighing Platform:
7 ft. (L) x 30 in. (W) x 5.75 in. (H)
Ramps:
24 in. (L) x 30 in. (W) x 5.75 in. (H)
- 15 ft. connecting cable to indicator, with
longer cable available as option
- Ramps quick-bolt to platforms
- Easily relocated, forklift portable

**COMPLETE WEIGHING SYSTEM
TOTALIZES WEIGHTS OF
FRONT & REAR AXLES**

Triner Scale and Manufacturing Company, Inc.

8411 Hacks Cross Road Olive Branch, MS 38654

Tel: (662) 890-2385 Fax: (662) 890-2386

Toll Free: (800) 238-0152

Email: info@trinerscale.com

TRINER SCALE


Accurate Around the World Since 1897

www.trinerscale.com

Twin Bridge Axle Scale System *Model TS60-730AW*

Specifications


Weighing Platform (includes two)

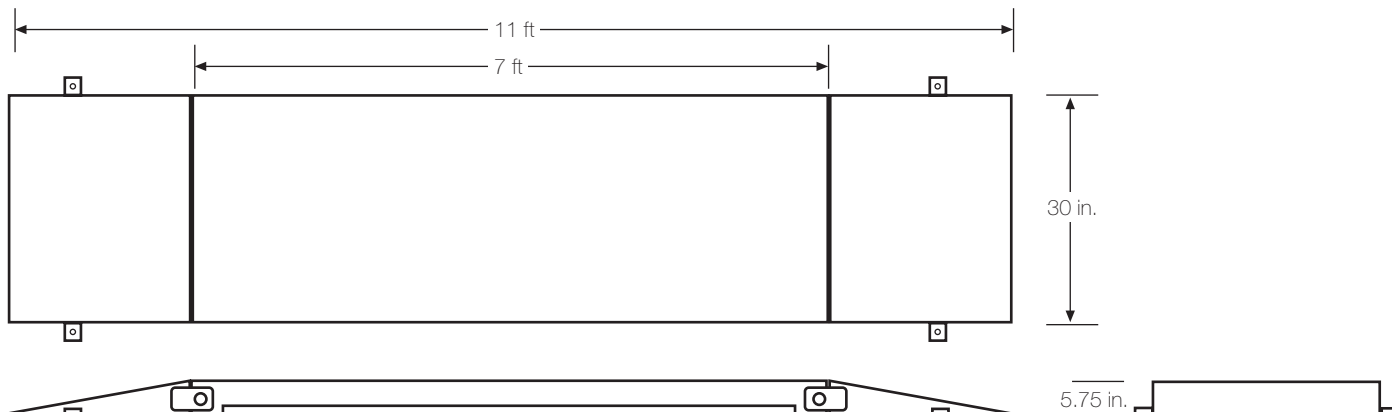

- Quick, easy setup
- High accuracy
- Designed and engineered for vehicle axle weighing
- All components are watertight for outdoor environments
- Forklift portable, easily relocated
- On/Off ramps include bolting tabs for fixed installations
- Heavy duty steel I-beam construction
- Treaded top plates
- NEMA 4X stainless steel junction boxes
- Durable two-part epoxy finish
- Factory calibrated
- One (1) year limited warranty

Total capacity: 60,000 lb
(30,000 lb per platform)
Four premium alloy steel nickel plated load cells per platform
Loadcells are IP67 watertight for outdoor environments
Loadcell capacity is 2.6 times the scale capacity
Built in overload protection
Two 15 ft. cables with watertight quick-connects
Shipping weight: 2,200 lb

Ohaus T71XW Digital Indicator

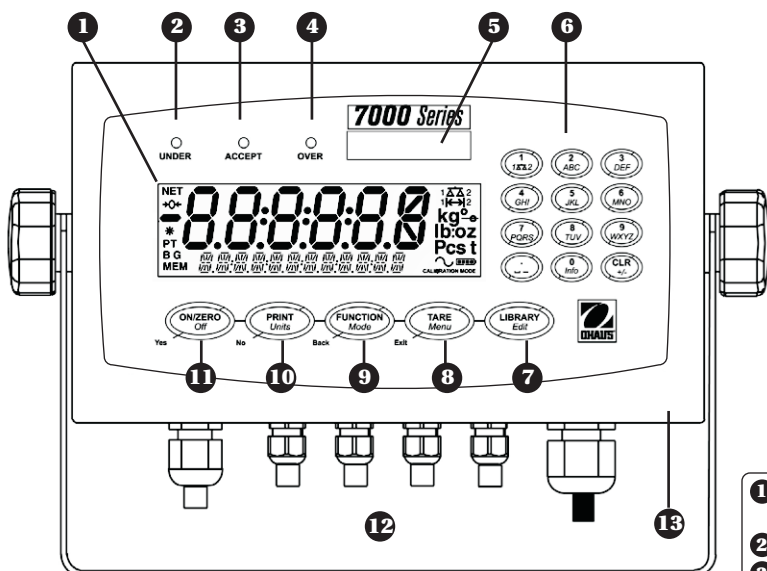

- NEMA 4X / IP66 water tight stainless steel construction
- Bright, easy to read dual line backlit display
- Accumulation mode to totalize weights
- Three-color programmable checkweigh indication with beep alert
- Easy to operate, 5-function key and alphanumeric keypad
- LB/KG unit conversion
- Keypad TARE function
- Built in RS-232 connection port
- Tilt adjustable, wall or desk mount stand
- Internal universal switching power supply automatically adapts to 100-240 VAC
- Optional NiCad battery

- | | | |
|----------------------------------|------------------------|---------------------------|
| 1 Display with dual-line readout | 6 Alphanumeric keypad | 10 PRINT, Units, No |
| 2 Under LED | 7 LIBRARY, Edit | 11 ON/ZERO, Off, Yes |
| 3 Accept LED | 8 TARE, Menu, Exit | 12 Connections |
| 4 Over LED | 9 FUNCTION, Mode, Back | 13 NEMA 4X/IP66 enclosure |
| 5 Capacity window | | |

Triner Scale and Manufacturing Company, Inc.

8411 Hacks Cross Road Olive Branch, MS 38654

Tel: (662) 890-2385 Fax: (662) 890-2386

Toll Free: (800) 238-0152

Email: info@trinerscale.com

TRINER SCALE

Accurate Around the World Since 1897

www.trinerscale.com